



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 700XP 4-Hot Plates Electric Boiling Top Range on Electric Oven

ITEM #

MODEL #

NAME #

SIS #

AIA #



371016 (E7ECEH4RE0)

4-hot plate (2,6 kW each)  
electric range on electric  
oven (6 kW)

371128 (E7ECEH4REN)

4-hot plate (2,6 kW each)  
electric range on electric  
oven (6 kW)

### Short Form Specification

#### Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. Four 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Stainless steel oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- The four round 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- Base compartment consists of an electric standard oven with thick oven door for heat insulation, positioned beneath the base plate.
- Electric oven to have separate thermostats for top and bottom heating elements.
- Stainless steel oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans).
- Ribbed enamelled steel oven base plate.
- The special design of the control knob system guarantees against water infiltration.
- IPX 4 water protection.
- Oven thermostat adjustable from 100 °C to 300 °C.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250

### Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐
- Junction sealing kit PNC 206086 ☐
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install base support and wheels PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 800mm PNC 206148 ☐
- Frontal kicking strip for concrete installation, 1000mm PNC 206150 ☐
- Frontal kicking strip for concrete installation, 1200mm PNC 206151 ☐
- Frontal kicking strip for concrete installation, 1600mm PNC 206152 ☐
- Frontal kicking strip, 800mm (not for refr-freezer base) PNC 206176 ☐
- Frontal kicking strip, 1000mm (not for refr-freezer base) PNC 206177 ☐
- Frontal kicking strip, 1200mm (not for refr-freezer base) PNC 206178 ☐
- Frontal kicking strip, 1600mm (not for refr-freezer base) PNC 206179 ☐
- Extension pipe for oil drainage for fryers (only for 371016) PNC 206209 ☐

APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)  
[professional@electrolux.com](mailto:professional@electrolux.com)

|                                                                               |            |                          |
|-------------------------------------------------------------------------------|------------|--------------------------|
| • Kit 4 feet for concrete installation (not for 900 line free standing grill) | PNC 206210 | <input type="checkbox"/> |
| • Pair of side kicking strips                                                 | PNC 206249 | <input type="checkbox"/> |
| • Pair of side kicking strips for concrete installation                       | PNC 206265 | <input type="checkbox"/> |
| • Water column with swivel arm (water column extension not included)          | PNC 206289 | <input type="checkbox"/> |
| • Water column extension for 700 line                                         | PNC 206291 | <input type="checkbox"/> |
| • Chimney upstand, 800mm                                                      | PNC 206304 | <input type="checkbox"/> |
| • Right and left side handrails                                               | PNC 206307 | <input type="checkbox"/> |
| • - NOTTRANSLATED -                                                           | PNC 206308 | <input type="checkbox"/> |
| • Base support for feet or wheels - 800mm (700/900)                           | PNC 206367 | <input type="checkbox"/> |
| • Base support for feet or wheels - 1200mm (700/900)                          | PNC 206368 | <input type="checkbox"/> |
| • Base support for feet or wheels - 1600mm (700/900)                          | PNC 206369 | <input type="checkbox"/> |
| • Base support for feet or wheels - 2000mm (700/900)                          | PNC 206370 | <input type="checkbox"/> |
| • Rear paneling - 800mm (700/900)                                             | PNC 206374 | <input type="checkbox"/> |
| • Rear paneling - 1000mm (700/900)                                            | PNC 206375 | <input type="checkbox"/> |
| • Rear paneling - 1200mm (700/900)                                            | PNC 206376 | <input type="checkbox"/> |
| • Chimney grid net, 400mm (700XP/900)                                         | PNC 206400 | <input type="checkbox"/> |
| • 2 side covering panels for free standing appliances                         | PNC 216000 | <input type="checkbox"/> |
| • Frontal handrail, 800mm                                                     | PNC 216047 | <input type="checkbox"/> |
| • Frontal handrail, 1200mm                                                    | PNC 216049 | <input type="checkbox"/> |
| • Frontal handrail, 1600mm                                                    | PNC 216050 | <input type="checkbox"/> |
| • Large handrail - portioning shelf, 800mm                                    | PNC 216186 | <input type="checkbox"/> |
| • Unclogging rod for 15lt fryers drainage pipe (only for 371128)              | PNC 921695 | <input type="checkbox"/> |


# Modular Cooking Range Line

## 700XP 4-Hot Plates Electric Boiling Top Range on Electric Oven

Front

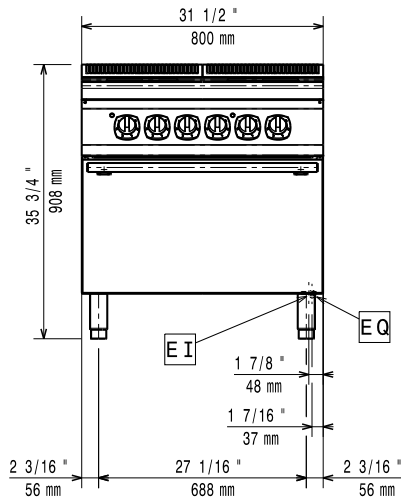


Side

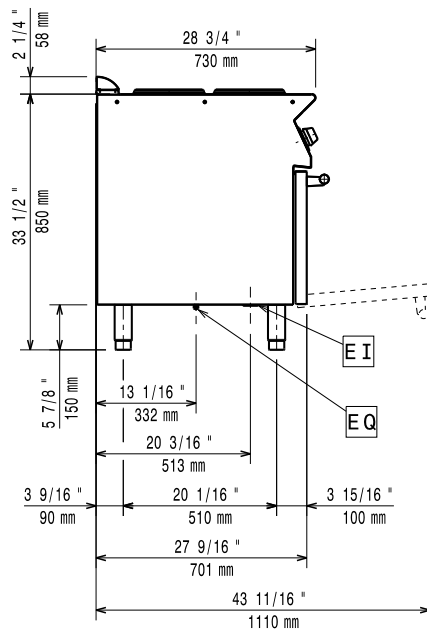

EI = Electrical inlet (power)  
 EQ = Equipotential screw

Top

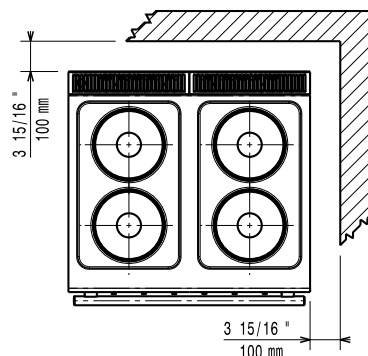

### Electric

#### Supply voltage:

371016 (E7ECEH4RE0)

380-400 V/3 ph/50-60 Hz

371128 (E7ECEH4REN)

230 V/3 ph/50/60 Hz

#### Total Watts:

16.4 kW

### Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

**Oven working Temperature:** 100 °C MIN; 300 °C MAX

#### Oven Cavity Dimensions

(width): 540 mm

#### Oven Cavity Dimensions

(height): 300 mm

#### Oven Cavity Dimensions

(depth): 650 mm

#### Net weight:

80 kg

#### Shipping weight:

95 kg

#### Shipping height:

371016 (E7ECEH4RE0)

1080 mm

371128 (E7ECEH4REN)

1140 mm

#### Shipping width:

820 mm

#### Shipping depth:

860 mm

#### Shipping volume:

371016 (E7ECEH4RE0)

0.76 m<sup>3</sup>

371128 (E7ECEH4REN)

0.8 m<sup>3</sup>

#### [NOT TRANSLATED]

371016 (E7ECEH4RE0)

EH74O

371128 (E7ECEH4REN)

N7CE1

#### Front Plates Power:

2.6 - 2.6 kW

#### Back Plates Power:

2.6 - 2.6 kW

#### Front Plates dimensions:

Ø 230 Ø 230

#### Back Plates dimensions:

Ø 230 Ø 230