



## Modular Cooking Range Line 900XP Half Module Gas PowerGrill Top HP

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



391219 (E9GRGDGC0P)

Half module gas PowerGrill  
top - HP

### Short Form Specification

#### Item No. \_\_\_\_\_

To be used with natural or LPG gas. High efficiency 11 kW stainless steel burners with self stabilizing flame. Cooking surface grids in cast iron, easily removable for cleaning. Stainless steel AISI 441 deflector shields below radiants avoid burner clogging. Includes drip tray for the collection of grease and fat. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Stainless steel AISI441 burners with self stabilizing flame.
- Burners are protected by AISI441 stainless steel deflector reaching approx. 700°C; top and side radiant plates distribute evenly the heating power while protecting the deflector from direct contact with the dripping fat, thus reducing flare ups (PATENT PENDING).
- Cooking grid reaching temperatures up to 350°C.
- Full-depth grease collection drawer, with hole to indicate when full, to collect residual cooking grease and fat. Can be filled-up with water for vapor-emission effect.
- Stainless-steel removable splash guards on the rear and sides
- All components (deflector, radiant plates, cooking grids, splash guards) can be dismantled for cleaning purposes.
- "Power Control" exclusive function: control knob allows fine-tuning of the power on a 240° rotation range between max and min, to optimize consumption while perfectly adapting to the food being cooked.
- "Stand-by" position on the control knob allows minimizing power consumption during non-peak periods, while allowing a fast recovery at the moment of need.
- The special design of the control knob system guarantees against water infiltration.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.
- Suitable for countertop installation.

### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Side and rear panel in AISI304 stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- All the functional components are accessible via the front of the appliance.

### Optional Accessories

- |                                                |                                     |
|------------------------------------------------|-------------------------------------|
| • Junction sealing kit                         | PNC 206086 <input type="checkbox"/> |
| • Support for bridge type installation, 800mm  | PNC 206137 <input type="checkbox"/> |
| • Support for bridge type installation, 1000mm | PNC 206138 <input type="checkbox"/> |
| • Support for bridge type installation, 1200mm | PNC 206139 <input type="checkbox"/> |
| • Support for bridge type installation, 1400mm | PNC 206140 <input type="checkbox"/> |
| • Support for bridge type installation, 1600mm | PNC 206141 <input type="checkbox"/> |

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)  
[professional@electrolux.com](mailto:professional@electrolux.com)



**Electrolux**  
PROFESSIONAL

**Modular Cooking Range Line  
900XP Half Module Gas PowerGrill  
Top HP**

|                                                                            |            |                          |
|----------------------------------------------------------------------------|------------|--------------------------|
| • Support for bridge type installation, 400mm                              | PNC 206154 | <input type="checkbox"/> |
| • Chimney upstand, 400mm                                                   | PNC 206303 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                       | PNC 206308 | <input type="checkbox"/> |
| • - NOT TRANSLATED -                                                       | PNC 206309 | <input type="checkbox"/> |
| • Scraper kit with hooks for HP grills                                     | PNC 206347 | <input type="checkbox"/> |
| • Kit G.25.3 (NI) gas nozzles for 700 and 900 gas grills (standard and HP) | PNC 206462 | <input type="checkbox"/> |
| • Side handrail-right/left hand (900XP)                                    | PNC 216044 | <input type="checkbox"/> |
| • Frontal handrail, 400mm                                                  | PNC 216046 | <input type="checkbox"/> |
| • Frontal handrail, 800mm                                                  | PNC 216047 | <input type="checkbox"/> |
| • Frontal handrail, 1200mm                                                 | PNC 216049 | <input type="checkbox"/> |
| • Frontal handrail, 1600mm                                                 | PNC 216050 | <input type="checkbox"/> |
| • Large handrail - portioning shelf, 400mm                                 | PNC 216185 | <input type="checkbox"/> |
| • Large handrail - portioning shelf, 800mm                                 | PNC 216186 | <input type="checkbox"/> |
| • Pressure regulator for gas units                                         | PNC 927225 | <input type="checkbox"/> |




**Modular Cooking Range Line  
900XP Half Module Gas PowerGrill Top HP**


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.03.07

Front

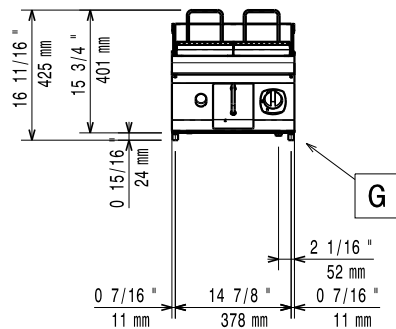


Side

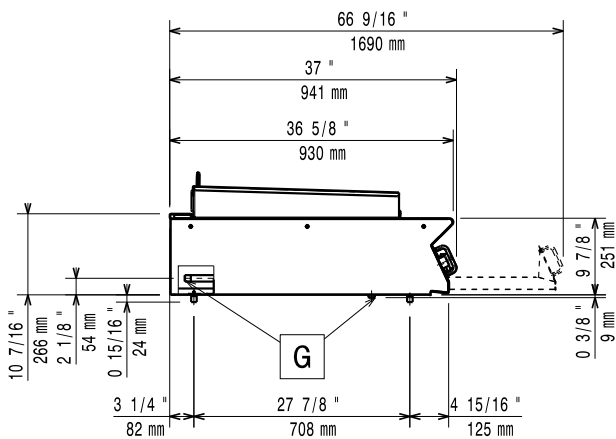

EQ = Equipotential screw  
 G = Gas connection

Top

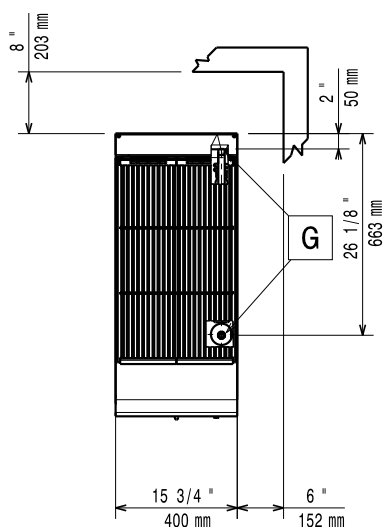

### Gas

|                         |                     |                          |
|-------------------------|---------------------|--------------------------|
| Natural gas - Pressure: | 391219 (E9GRGDGC0P) | 7" w.c. (17.4 mbar)      |
| Gas Power:              |                     | 10.5 kW                  |
| Standard gas delivery:  |                     | Natural Gas G20 (20mbar) |
| Gas Type Option:        |                     | LPG; Natural Gas         |
| Gas Inlet:              |                     | 3/4"                     |

### Key Information:

|                              |                     |
|------------------------------|---------------------|
| External dimensions, Width:  | 400 mm              |
| External dimensions, Depth:  | 930 mm              |
| External dimensions, Height: | 250 mm              |
| Net weight:                  | 60 kg               |
| Shipping weight:             | 65 kg               |
| Shipping height:             | 580 mm              |
| Shipping width:              | 460 mm              |
| Shipping depth:              | 1020 mm             |
| Shipping volume:             | 0.27 m <sup>3</sup> |
| [NOT TRANSLATED]             | N9EGG               |

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.