



600088 (KE120S)

Cutter Mixer 11,5 lt capacity, timer, variable speed 300-3500 rpm. Supplied with microtoothed rotor, stainless steel bowl and scraper

Main Features

- Food processor allows fast liquidizing, mixing, mincing, chopping and pastry-making.
- Lid with central opening to add ingredients in mid-cycle.
- Base fixed cover for a better handling.
- Productivity suitable for 100-200 meals per service.
- Delivered with: - 11.5 liter stainless steel bowl with max liquid level indication to avoid spillage - micro toothed perforated blade - scraper
- Angled perforated knives and conical base of the bowl ensure consistent mixing.
- Cover metal frame to ensure seal water tightness to avoid leakage.
- All parts in contact with food are removable without tools and completely dismountable.

Construction

- Asynchronous silent industrial motor for heavy duty and longer life.
- IP65 touch button control panel.
- Transparent BPA free cover incorporates a magnetic safety system which stops the machine if lid is not properly closed.
- Variable speed from 300 to 3500 rpm.
- Power: 2200 watts.
- 304 AISI stainless steel bowl with leak resistant spout and handles, easy to manage.
- Scraper with SS handle, easy to dismount.
- Cover handle with double safety locking system.
- A safety device requires to press the start button to restart the machine after a power cut.



Included Accessories

PNC Code	Description	Quantity
650059	Scraper for K120 and KE120 cutter mixer	1
650060	Microtoothed blade rotor for 11,5 lt cutter mixer	1
650073	Stainless steel bowl for 11,5 lt cutter mixer	1

Optional Accessories

PNC Code	Description
----------	-------------

Bowls/tools

650059	Scraper for K120 and KE120 cutter mixer
650060	Microtoothed blade rotor for 11,5 lt cutter mixer
650073	Stainless steel bowl for 11,5 lt cutter mixer
653299	Serrated blade rotor for 11,5 lt cutter mixer
653538	Serrated blade rotor for meat for 11,5 lt cutter mixer
653872	Smooth blade rotor for 11,5 lt cutter mixer

Trolleys/tables

653017	Stainless steel mobile stand with 4 wheels (2 fixed and 2 pivoting with brake). Height: 730 mm
--------	--




Technical specifications


Electric

Supply voltage:	200-240 V/1N ph/50/60 Hz
Electrical power max.:	2.2 kW
Capacity:	
Performance (up to):	6 kg/Cycle
Capacity:	11.5 liters
Key Information:	
External dimensions, Width:	416 mm
External dimensions, Depth:	680 mm
External dimensions, Height:	517 mm
Shipping weight (gross):	73 kg


Front

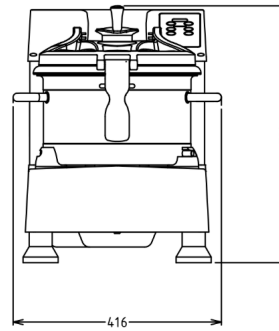

Side

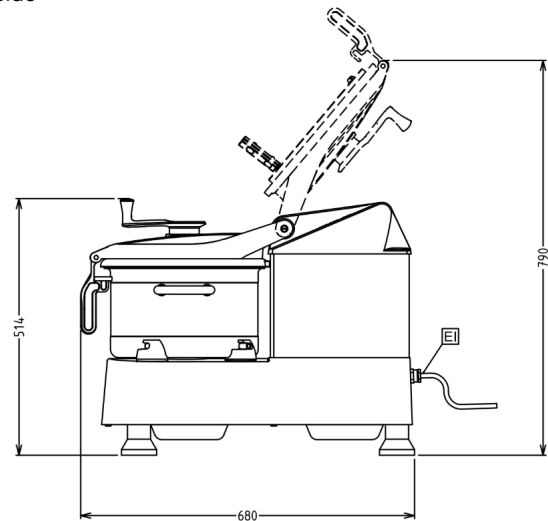

Top

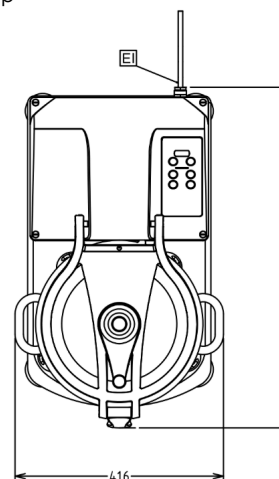

EI = Electrical inlet (power)



Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026/05/11

3/3