

**600509 (K45YVVA)**

Cutter Mixer 4,5 lt bowl capacity, variable speed 300 to 3700 rpm. Supplied with micro toothed blade rotor and stainless steel bowl (Australia)

Main Features

- All parts in contact with food are removable without the use of tools, completely dismountable and dishwasher safe.
- Easy to clean and waterproof control panel with flat on/off button and pulse function.
- Emulsifier function (scraper) included as standard.
- Microswitch and safety devices on handle, lid and bowl.
- Lid with central opening to add ingredients in mid-cycle.
- Table-mounted robust cutter and emulsifier allows fast liquidizing, mixing, chopping, mincing, and pastry-making.
- Pulse function for coarse chopping.
- Base fixed cover for a better handling.
- Productivity suitable for 50-100 meals per service.

Construction

- Micro-toothed blades in 420 AISI stainless steel and ergonomic scraper in resistant composite material to ensure consistent mixing.
- Stainless steel 4.5 liter bowl has a high chimney to ensure high productivity also when processing liquids.
- Transparent lid incorporates a magnetic contact safety system.
- Variable speed from 300 to 3700 rpm.
- Improved ventilation system to manage smoothly heavy duty use.
- Reinforced feet to withstand the repeated handling of the unit.

Included Accessories

PNC Code	Description	Quantity
650099	Lid and bowl scraper for 4,5 lt cutter mixer	1
653589	Stainless steel bowl for 4,5 lt cutter mixer	1
653876	Microtoothed blade rotor for 4,5 lt cutter mixer	1





Optional Accessories

PNC Code	Description
Bowls/tools	
650099	Lid and bowl scraper for 4,5 lt cutter mixer
653589	Stainless steel bowl for 4,5 lt cutter mixer
653875	Smooth blade rotor for 4,5 lt cutter mixer
653876	Microtoothed blade rotor for 4,5 lt cutter mixer
653877	Microtoothed blade rotor (for emulsions) for 4,5 lt cutter mixer




Technical specifications


Electric

Supply voltage:	200-240 V/1N ph/50/60 Hz
Electrical power max.:	1 kW
Capacity:	
Performance (up to):	2 kg/Cycle
Capacity:	4.5 liters
Key Information:	
External dimensions, Width:	256 mm
External dimensions, Depth:	415 mm
External dimensions, Height:	482 mm
Shipping weight (gross):	25 kg
Waterproof index:	IP23


Front

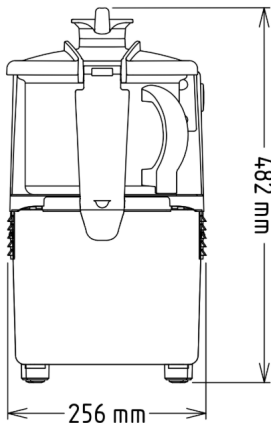

Side

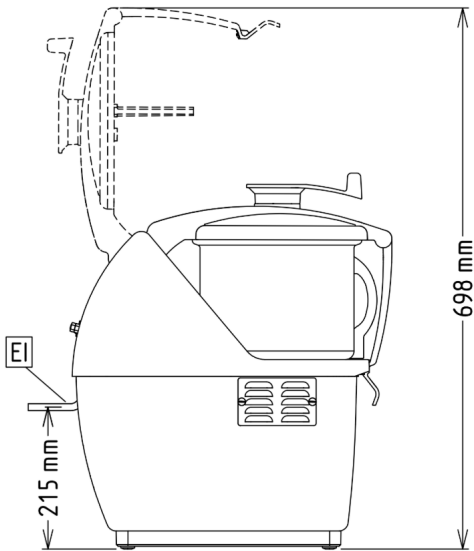

Top

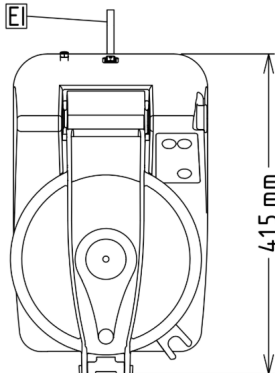

EI = Electrical inlet (power)



Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026/06/09
3/3