

**600355 (BP3535)**

Portable Mixer, variable speed up to 9000 rpm, with stainless steel tube 353 mm, 350W

Main Features

- Bayonet system to easily remove accessories without the use of tools.
- Safety feature requires both hands to start the mixer (no volt release system).
- Red luminous indicator flashes when the device is overloaded.
- Parts in contact with food - tube, blade, shaft - can be completely dismantled without tools for easy cleaning.
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Anti-splash bell knife design.
- Bayonet system makes fast and simple to exchange tools.
- Overheating warning red indicator.
- Tube, knife and whisks are dishwasher safe.
- Productivity suitable for 50 to 300 meals per service.
- Designed to be used directly in stew pots up to 30 lt with the 35 cm tube and 50 lt with the 45 cm tube.
- Delivered with: - flat base motor - stainless steel tube - space saving storing wall support

Construction

- Maximum speed 9000 rpm.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Smart speed control to ensure the right power according to the work load.
- Power: 350 watts.
- Water protected motor unit (controls are IP55, IP34 throughout machine).

Included Accessories

PNC Code	Description	Quantity
650132	353 mm stainless steel tube for portable mixer bermixer	1



Optional Accessories

PNC Code	Description
Mixing tubes & supports	
650108	Reinforced whisk for portable Bermixer
650132	353 mm stainless steel tube for portable mixer bermixer
650133	453 mm stainless steel tube for portable mixer bermixer
653292	Adjustable rail for containers diam. 375 mm to 650 mm (to be used with 653294)
653294	Holder to support portable mixer in containers (can be used only with tube attachment)



Technical specifications

Electric

Supply voltage:	220-240 V/1 ph/50/60 Hz
Electrical power max.:	0.35 kW


Capacity:

Capacity (up to):	30 litres
-------------------	-----------


Key Information:

External dimensions, Width:	138 mm
External dimensions, Depth:	120 mm
External dimensions, Height:	665 mm
Shipping weight (gross):	5.43 kg
Tube length:	35 cm


Front

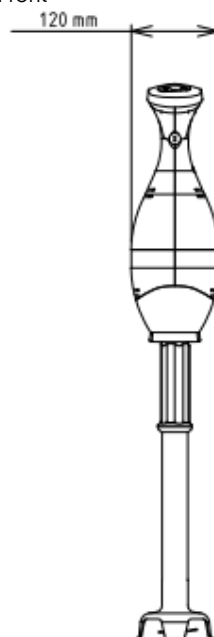

Side

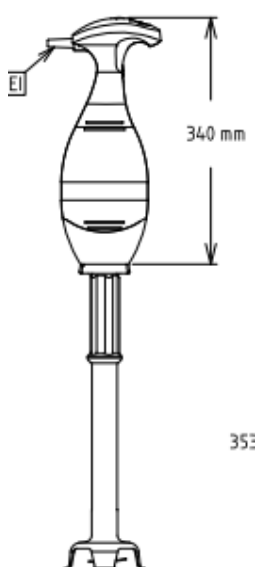

Top



EI = Electrical inlet (power)



Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026/05/11

3/3