

600589 (BP6555A)

Portable Mixer, variable speed up to 10000 rpm, with stainless steel tube 553 mm, 650W - Australia

600590 (BP6565A)

Portable Mixer, variable speed up to 10000 rpm, with stainless steel tube 653 mm, 650W - Australia

Main Features

- Safety feature requires both hands to start the mixer (no volt release system).
- Parts in contact with food - tube, blade, shaft - can be completely dismantled without tools for easy cleaning.
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Anti-splash bell knife design.
- Bayonet system makes fast and simple to exchange tools.
- Overheating warning red indicator.
- Tube, knife and whisks are dishwasher safe.
- Productivity suitable for 50 to 300 meals per service.
- Delivered with: - flat base motor - stainless steel tube - space saving storing wall support
- Delivered with: - flat base motor - stainless steel whisk and tube - space saving storing wall support - reinforced whisk
- Designed to be used directly in stew pots up to 220 lt. (only for 600589)
- Delivered with: - flat base motor - stainless steel whisk and tube - space saving storing wall support (only for 600590)
- Designed to be used directly in stew pots up to 200 lt with the 55 cm tube and 250 lt with the 65 cm tube. (only for 600590)
- Designed to be used directly in stew pots up to 240 lt. (only for 600590)

Construction

- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Maximum speed 10000 rpm.
- Smart speed control to ensure the right power according to the work load.
- Water protected motor unit (controls are IP55, IP34 throughout machine).
- Power: 650 watts.

Included Accessories

PNC Code	Description	Quantity
650134	553 mm stainless steel tube for Bermixer (for 450W, 550W, 650W, 750W) (only for 600589)	1
650135	653 mm stainless steel tube for Bermixer (for 650W, 750W) (only for 600590)	1






Optional Accessories

PNC Code	Description
Mixing tubes & supports	
650108	Reinforced whisk for portable Bermixer
650132	353 mm stainless steel tube for portable mixer bermixer
650133	453 mm stainless steel tube for portable mixer bermixer
650134	553 mm stainless steel tube for Bermixer (for 450W, 550W, 650W, 750W)
650135	653 mm stainless steel tube for Bermixer (for 650W, 750W)
653292	Adjustable rail for containers diam. 375 mm to 650 mm (to be used with 653294)
653294	Holder to support portable mixer in containers (can be used only with tube attachment)



Technical specifications

	600589	600590
Electric		
Supply voltage:	220-240 V/1 ph/50/60 Hz	220-240 V/1 ph/50/60 Hz
Electrical power max.:	0.66 kW	0.66 kW
Capacity:		
Capacity (up to):	0	0
Key Information:		
External dimensions, Width:	138 mm	138 mm
External dimensions, Depth:	120 mm	120 mm
External dimensions, Height:	865 mm	965 mm
Shipping weight (gross):	4.8 kg	5 kg

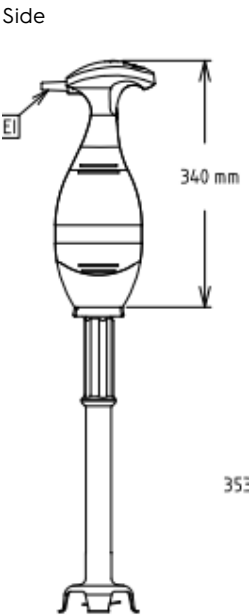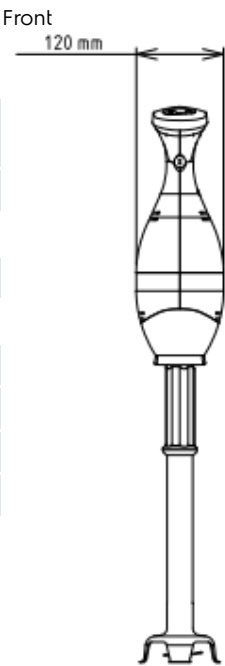

EI = Electrical inlet (power)



Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.