

Plug In SpeedLight with flexible top plate, ribbed, removable teflon plate

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


603904 (HSG3RPRU2)

 SpeedLight with Flexible
 Top ribbed Contact Plate,
 dark grey - Australia

Short Form Specification

Item No. _____

Lid, top plate, back cover and side panels constructed in 304 AISI stainless steel, bottom in AISI 430 stainless steel and external high-grade composite material paneling and handle and. Self-adjusting upper plate adapting to food thickness or blockable in fixed position to avoid contact with food. Possibility to manually adjust the maximum movement of the upper plate. Ribbed top contact plate 8 7/16" x 8 7/16" (215 x 215 mm) in aluminum with non-stick coating. Can accept snacks from 25/64" to 2 61/64" (10 to 75 mm) thick. Smooth 4 mm thick quartz glass bottom cooking surface 10" x 10" (250 x 250 mm). 2 probes independently control the temperature of the top and bottom plates from 212 to 536°F (100 to 250 °C). Automatic lid holding and lifting at the end of the cooking cycle via mechanical spring. Electronic control with digital 4,3" LED display, countdown display and buzzer at the end of the cycle. 800 W heating element on the top plate and 800 W electrical armored heating elements on the bottom plate. 2 x 1050 W magnetrons for microwaves. Front air inlet and back outlet for efficient cooling ventilation. Ergonomic handle in high-grade composite material for easy movement of the lid. Removable top front panel and dismountable top cooking plate for better cleanability. 8 preloaded programs (editable): P1 = 70 sec. (12 sec. MW) P2 = 80 sec. (8 sec. MW) P3 = 60 sec. (20 sec. MW) P4 = 75 sec. (25 sec. MW) P5 = 85 sec. (25 sec. MW) P6 = 85 sec. (18 sec. MW) P7 = 30 sec. (25 sec. MW) P8 = 12 sec. (no MW) With Top temperature = 249° C and bottom temperature = 230° C

Main Features

- It combines 3 cooking technologies: contact, infrared radiation and microwaves to provide perfectly cooked food, heated to the core.
- Self adjusting upper plate to heat food adapting to its thickness.
- The Energy Saving Mode automatically switches to stand-by after an amount of time settled by the operator (from 1 to 60 minutes).
- Delivered with USB port and wi-fi connection to optimize workflows allowing local and remote interaction (temperatures, countdowns, warnings).
- Electronic control with digital 4.3" LED display with adjustable brightness.
- 8 programs selectable on the display.
The 8 programs can be adjusted by the user. The programmable parameters are:
-top plate temperature
-bottom plate temperature
-total duration of each cycle
-duration and distribution of microwaves within each cycle.
- Countdown display and buzzer with adjustable volume at the end of the cycle.
- Automatic mechanical lid holding and opening system controlled.
- Ergonomic handle for easy movement of the lid.
- Non-stick pressed tray to be used during all cooking cycles for maximum cleanability, meeting food contact requirements.
- ETL safety approved, complies with UL 923 and CAN/CSA 22.2 standards.
- ETL sanitation approved, complies with NSF/ANSI 4 standard.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory - contact the Company for more details).
- IPX4 water resistance certification.

APPROVAL: _____

Construction

- Aluminum ribbed top contact plate (215 x 215 mm) treated with a special non-stick coating.
- 2 temperature probes for an independent control of the top and bottom plate temperature.
- Smooth 4 mm thick quartz glass bottom cooking surface (250 x 250 mm).
- Independent temperature setting of the top and bottom plates from 100 to 250 °C.
- Automatic lifting of the lid at the end of the cooking cycle via mechanical spring.
- Lid covers, handle and side panels in high-grade reinforced composite material.
- 800W heating element on the top plate.
- 800W electrical armored heating elements on the bottom plate.
- 2 x 1050W magnetrons for microwave.
- Front air inlet and back outlet for efficient cooling ventilation allows easy air filters removal and side by side installation.


Included Accessories

- 1 of Glass saver for HSG Panini PNC 653527
- 1 of Cleaning brush for HSG Panini PNC 653623
- 1 of Spatula for HSG Panini PNC 653625
- 1 of 4 stainless steel feet - Height = 76 mm for SpeedDelight PNC 653791
- 1 of SpeedDelight spacer stop kit for rear ventilation PNC 653800


Optional Accessories

- Glass saver for HSG Panini PNC 653527 ☐
- Cleaning brush for HSG Panini PNC 653623 ☐
- Spatula for HSG Panini PNC 653625 ☐
- Removable teflon plate for HSG panini grill PNC 653787 ☐
- 4 rubber feet - Height = 26 mm for SpeedDelight PNC 653792 ☐
- 4 rubber feet - Height = 40 mm for SpeedDelight PNC 653793 ☐
- SpeedDelight spacer stop kit for rear ventilation PNC 653800 ☐
- Pressed non-stick tray PNC 653802 ☐
- Brush with nylon bristles PNC 653803 ☐
- Brush with brass bristles PNC 653804 ☐

Front

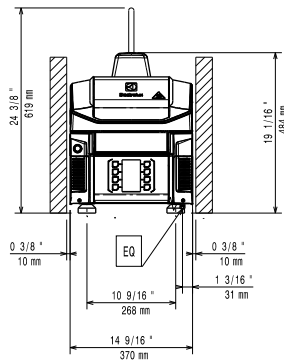


Side




EI = Electrical inlet (power)
 EO = Electrical Outlet

Top



Distances

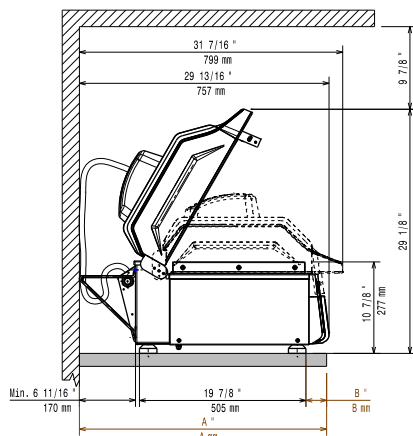

Electric

Supply voltage:
 603904 (HSG3RPRU2) 420 V/3N ph/50 Hz
 Rated amps: 8 A
 Total Watts: 4.5 kW
 Plug type: IEC 60309 3P+N+T

Installation:

Clearance: 190mm from rear vertical panel

Key Information:

Cooking surface (WxD) 270 x 270 mm
 External dimensions, Width: 370 mm
 External dimensions, Depth: 683 mm
 External dimensions, Height: 619 mm
 Net weight: 47 kg
 Shipping weight: 59 kg
 Shipping height: 710 mm
 Shipping width: 450 mm
 Shipping depth: 760 mm
 Shipping volume: 0.24 m³